REVISION			
LTR	DESCRIPTION	DATE	APPROVED
A	NEW RELEASE	09/17/00	H.T.

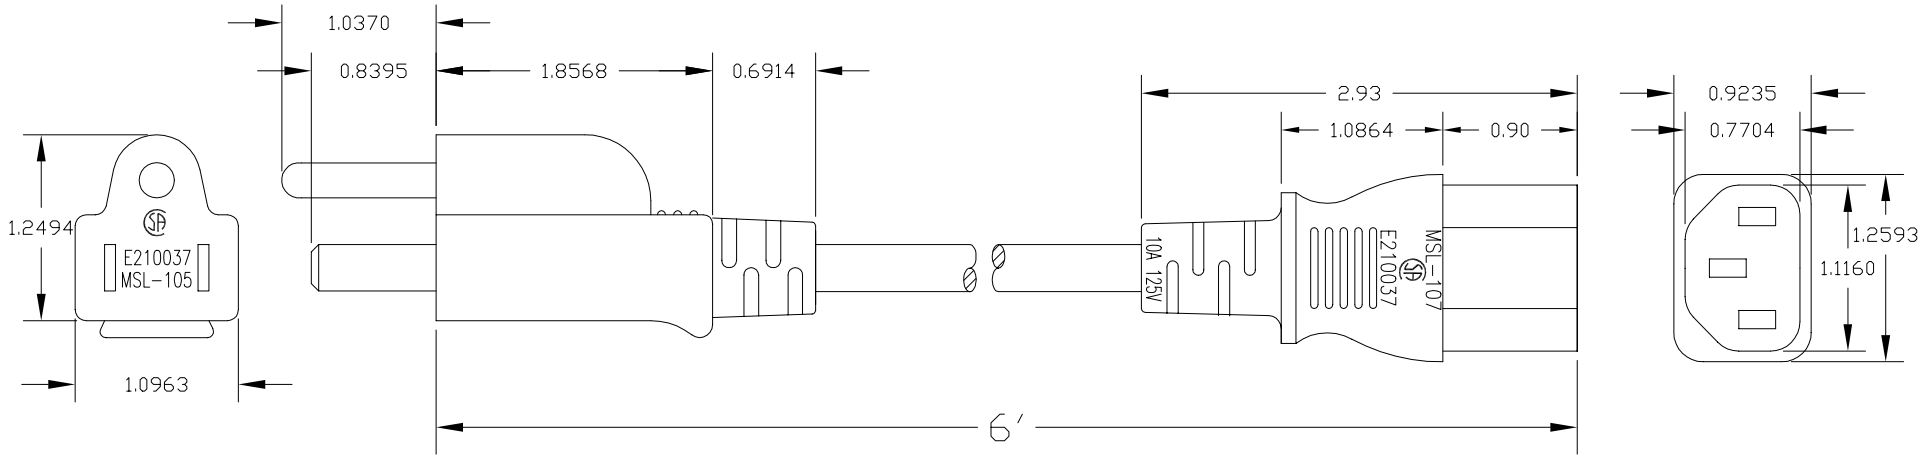

PLUG: MSL-105

CONNECTOR: MSL-107

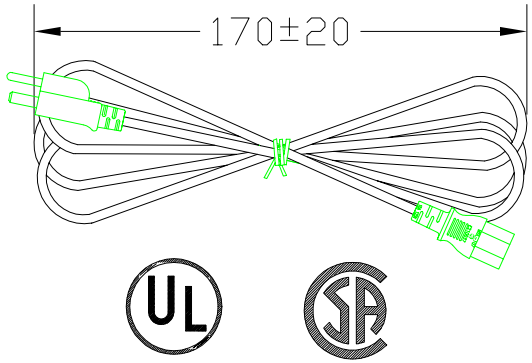

☑SVT ☐SJT ☐SJTW	AWG
UL/CSA:60°C	18
UL/CSA:60°C SHIELDED	
UL/CSA:60°C~75°C	
UL/CSA:60°C~75°C SHIELDED	
UL/CSA:105°C	
UL/CSA:105°C SHIELDED	
☐NON MIGRATION ☐MIGRATION	

NOTE:

CABLE: 18AWG 3C, AL/MY FOIL SHIELDING

Power Cord Maximum Rating: 10A @ 125V

UNLESS OTHERWISE SPECIFIED:
1. DIMENSION ARE IN INCHS
2. TOLERANCES:
   DECIMALES X.XX ±0.25
3. DO NOT SCALE DRAWING
4. REMOVE ALL BURRS AND BREAK SHARP EDGES.

PROPRIETARY DOCUMENT
THIS DRAWING AND/OR INFORMATION OR SUBJECT MATTER CONTAINED HEREIN, SHALL NOT BE USED, COPIED OR DISSEMINATED IN ANY MANNER, OR FOR ANY PURPOSE, OTHER THAN AS EXPRESSLY STATED BY COMTOP Enterprises Corp.

CUSTOMER

R.F.Q. NO.

DRAWN Howie Tseng DATE 09/17/00

CHECKED

CUSTOMER APPROVAL

COMTOP Enterprises Corp.
268 BENTON Ct.
Industry, CA 91789
TEL.: 909-468-5737
FAX: 909-468-5726

TITLE

Shielded AC Power Cord
(PC to Wall Power Cord, Shielded)

SIZE	DWG NO.	PART NO.	REV.
	10W1-012-SH	10W1-012XX-SH	A

SCALE: NONE | RELEASE DATE: 09/17/00 | SHEET: 1 OF 1